

11-01-00

PATENT

A

Attorney's Docket No. 00-8008

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box Patent Application
Assistant Commissioner for Patents
Washington, D. C. 20231

NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of:

Inventor(s): Weiya Luo
Anthony Wogrin Confrey
Michael J. Turok
Bruce Wilson

For:

**SYSTEMS AND METHODS FOR MANAGING FAULTS IN A
NETWORK**

Certification Under 37 CFR 1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date 10/31/00 in an envelope as "Express Mail Post Office to Addressee" mailing label EL029404783US addressed to the: Assistant Commissioner for Patents, Washington, D.C. 20231.

Mary E. Anza
(typed or printed name of person mailing paper)

Mary E. Anza
(Signature of person mailing paper)


Attorney's Docket No. 00-8008

Enclosed are:

[28] pages of specification and cover sheet
 [14] pages of claims
 [1] page of abstract
 [11] sheets of formal drawings
 [2] pages of declaration and power of attorney.
 [] pages of assignment and assignment recordation form
 [2] pages of information disclosure statement
 [1] pages of form 1449
 [2] references
 [1] return postcard

CLAIMS AS FILED			
	NUMBER FILED	NUMBER EXTRA	BASIC FEE \$710.00
TOTAL			
CLAIMS	53 - 20	33 x	\$18.00
INDEPENDENT			
CLAIMS	14 - 3	11 x	\$80.00
MULTIPLE			
DEPENDENT			
CLAIMS(S)		0 x	\$270.00
			0.00
		TOTAL FILING FEE	\$2184.00

- [x] Please charge my Deposit Account No. 07-2339 in the amount of **\$2184.00**. **This transmittal letter is submitted in duplicate.**
- [x] The Commissioner is hereby authorized to charge any additional fees under 37 CFR 1.16 and 1.17 which may be required by the papers submitted herewith or credit any overpayment to Account No. 07-2339.
This transmittal letter is submitted in duplicate.

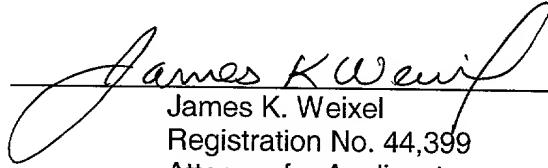
James K. Weixel
Registration No. 44,399
Attorney for Applicant

Verizon Services Group
600 Hidden Ridge, HQE03G13
Irving, TX 75038
Phone: (781) 466-2220
Fax: (781) 466-4021

EXPRESS MAIL NO. EL029404783US

PATENT

Docket No. 00-8008

UNITED STATES PATENT APPLICATION

OF

Weiya LUO

Anthony Wogrin CONFREY

Michael L. TUROK

and

Bruce WILSON

FOR

SYSTEMS AND METHODS FOR MANAGING FAULTS IN A NETWORK

SYSTEMS AND METHODS FOR MANAGING FAULTS IN A NETWORK

FIELD OF THE INVENTION

The present invention relates generally to networks and, more particularly, to systems and methods for improving network management.

BACKGROUND OF THE INVENTION

Presently, the act of troubleshooting a network is a time-consuming task. Several solutions exist that aid network administrators in managing faults in a network by providing various tools for collecting and viewing individual faults (i.e., alarms) and performing a set of operations on them (e.g., acknowledge, clear, escalate, etc.). Typically, these views are variations on tabular displays (i.e., rows of alarms) and two-dimensional (2D) topology displays (i.e., network maps).

These tools are generally adequate for small-to-medium scale network operation centers, such as network operation centers with less than 100 alarms/per shift/per monitoring technician, moderate requirements on the frequency of network upgrades, etc. In environments with a large number of network elements and high alarm rates, however, these tools are often limited with respect to their ability to display relevant, real-time, fault information to monitoring technicians and network operation center's management. These limitations often invalidate the use of available tools in support of large-scale network operations.

Therefore, there exists a need for systems and methods that facilitate the management of a network.

SUMMARY OF THE INVENTION

A system and method consistent with the present invention address this and other needs by providing a mechanism that facilitates network management.

In accordance with the purpose of the invention as embodied and broadly
5 described herein, a method for managing a network includes providing a first list of events occurring in the network; simultaneously providing a second list of events occurring in the network, the second list comprising a predetermined number of most recent events; and managing the network using the first and second lists.

In another implementation consistent with the present invention, a device for
10 managing a network having a plurality of network elements includes a memory and a processor. The processor provides a list of identifiers associated with the plurality of network elements, where each network element identifier is associated with a state indication.

In yet another implementation consistent with the present invention, a method
15 for managing a network having a plurality of network devices includes associating events in the network with one of the plurality of network devices; providing a geographical map, the geographical map displaying locations of each of the plurality of network devices and indicating which of the plurality of network devices are associated with at least one event; and managing the network using the geographical
20 map.

In still yet another implementation consistent with the present invention, a device for managing a network having a plurality of network elements includes a

memory and a processor. The processor associates each network element with one of a plurality of logical planes and provides a network map. The network map displays relationships between the plurality of logical planes and those network elements associated with the plurality of logical planes.

5 In still another implementation consistent with the present invention, a system for managing a network having a plurality of network elements includes a user device and a server. The user device provides a user with a list of network management options, the options including a network element diagnostic option, a network summary option, a geographical network management option, a three-dimensional
10 network management option, transmits, in response to a selection of an option by the user, a request for current network information, provides the user with current network information according to the selected option. The server receives the request for current network information and transmits current network information to the user device.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate an embodiment of the invention and, together with the description, explain the invention. In the drawings,

FIG. 1 illustrates an exemplary system in which systems and methods,
20 consistent with the present invention, may be implemented;

FIG. 2 illustrates an exemplary server consistent with the present invention;

FIGS. 3A and 3B illustrate exemplary databases consistent with the present invention;

FIG. 4 illustrates an exemplary network operations center consistent with the present invention;

5 FIGS. 5-8 illustrate exemplary graphical user interfaces, consistent with the present invention, that facilitate network management operations;

FIG. 9 illustrates an exemplary process, consistent with the present invention, that improves management of a network; and

10 FIG. 10 illustrates an exemplary graphical user interface that may be provided to the user of a network operations center.

DETAILED DESCRIPTION

15 The following detailed description of the invention refers to the accompanying drawings. The same reference numbers in different drawings identify the same or similar elements. Also, the following detailed description does not limit the invention. Instead, the scope of the invention is defined by the appended claims.

20 Systems and methods, consistent with the present invention, provide a mechanism to improve network management. The mechanism simplifies the manner in which a user (e.g., a network engineer) analyzes the operation of the network by providing the user with several graphical user interfaces. The graphical user interfaces allow the user to manage the network in a variety of ways.

EXEMPLARY SYSTEM

FIG. 1 illustrates an exemplary system 100 in which systems and methods,

consistent with the present invention, that improve management of a network may be implemented. In FIG. 1, system 100 includes a network 110, points of presence (POPs) 112-122, a server 130, a network operations center (NOC) 140, and a group of nodes 161-169 that may be directly connected to a POP 112-122 or connected via a customer network 151-153.

The network 110 may include, for example, the Internet, an intranet, a local area network (LAN), a metropolitan area network (MAN), a wide area network (WAN), or the like. In fact, the network 110 may include any type of network or combination of networks that permits routing of information from a particular source to a particular destination.

The POPs 112-122 may include conventional routers that decide, based on routing protocols (e.g., a frame relay protocol) and routing tables, how and where to send packets of information. Each POP 112-122 may also include one or more servers, such as an e-mail server or a World Wide Web server. Each POP 112-122 may be implemented via hardware and/or software.

The server 130 may include any type of computer system, such as a mainframe, minicomputer, or personal computer, capable of connecting to the network 110 to communicate with other devices, such as the network operations center 140, in the system 100. In alternative implementations, the server 130 may include a mechanism for directly connecting to the network operations center 140 or may be included within network operations center 140. The server 130 may also include a mechanism for communicating with the nodes 161-169. The server 130 may

transmit data over network 110 or receive data from the network 110 via a wired, wireless, or optical connection.

The network operations center 140 may include any type of computer system, such as a mainframe, minicomputer, personal computer, laptop, personal digital assistant, or the like, capable of connecting to the network 110. The network operations center 140 monitors and manages the operation of the network 110. The network operations center 140 may transmit data over the network 110 or receive data from the network 110 via a wired, wireless, or optical connection.

The customer networks 151-153 may include any type of local network, such as a LAN, MAN, WAN, or the like, that permits routing of information packets among the nodes connected to the respective network. The nodes 161-169 may include computers, such as workstations and servers, or any other type of device that has a network interface card (NIC), such as a printer or modem. Moreover, the nodes 161-169 may include devices, such as a personal digital assistant, that connect to a particular local network via a wireless connection.

The number of components illustrated in FIG. 1 is provided for simplicity. In practice, a typical system 100 may include a larger or smaller number of networks, POPs, servers, network operations centers, customer networks, and/or nodes.

EXEMPLARY SERVER CONFIGURATION

FIG. 2 illustrates an exemplary server 130 consistent with the present invention. The server 130 includes a bus 210, a processor 220, a memory 230, an input device 240, an output device 250, and a communication interface 260. The bus

210 may include one or more conventional buses that permit communication among the components of the server 130.

The processor 220 may include any type of conventional processor or microprocessor that interprets and executes instructions. The memory 230 may include a random access memory (RAM) or another type of dynamic storage device that stores information and instructions for execution by the processor 220; a read only memory (ROM) or another type of static storage device that stores static information and instructions for use by the processor 220; and/or some other type of magnetic or optical recording medium and its corresponding drive.

The input device 240 may include one or more conventional mechanisms that permit an operator to input information to the server 130, such as a keyboard, a mouse, a pen, voice recognition and/or biometric mechanisms, and the like. The output device 250 may include one or more conventional mechanisms that output information to the operator, including a display, a printer, a speaker, etc. The communication interface 260 may include any transceiver-like mechanism that enables the server 130 to communicate with other devices and/or systems. For example, the communication interface 260 may include mechanisms for communicating with the network operations center 140 via a network, such as network 110 (FIG. 1).

Execution of the sequences of instructions contained in memory 230 causes processor 220 to provide current network information as described below. In alternative embodiments, hard-wired circuitry may be used in place of or in

combination with software instructions to implement the present invention. Thus, the present invention is not limited to any specific combination of hardware circuitry and software.

The server 130, consistent with the present invention, provides information from one or more databases to a graphical user interface at the network operations center 140. The database may be stored at the server 130 (e.g., in memory 230) or externally from server 130.

FIGS. 3A and 3B illustrate exemplary databases 310 and 330, respectively, consistent with the present invention. It will be appreciated that server 130 may consist of other databases stored locally or distributed throughout the network 110.

As illustrated, database 310 includes a group of entries 305 that relate to events that occurred in the network 110. Each entry 305 may include information stored in one more of the following exemplary fields: an alarm type field 311, an optional number field 312, a state field 313, an action field 314, a time field 315, a date field 316, a network element (NE) identifier (ID) field 317, and an alarm description field 318. Database 310 may contain additional or different fields that would aid the server 130 in searching and sorting information in database 310. While information for a single network element (ABCDEFGH03H) is illustrated in FIG. 3A, it will be appreciated that database 310 may include information for more than one network element.

The alarm type field 311 may store an identifier indicating the type of alarm associated with a network element. Typical alarms may include, for example, a fire

alarm, a port alarm, a line alarm, and the like. The alarm type field 311 may include a subfield (not shown) that stores a variable indicative of the severity of a corresponding alarm. Alarm severity categories might include critical, major, minor, and informational. The optional number field 312 may store an indication of the number
5 of alarms represented by a single alarm icon.

The state field 313 may store an indication, represented by one or more letters, of the state of the alarm. For example, an "A" may represent an acknowledged alarm, an "E" may represent an escalated alarm state, an "AE" may represent an alarm that has been acknowledged and escalated, and a "C" may represent that an alarm has been cleared. The state field 313 may be left blank to indicate that an alarm has not been
10 acknowledged, escalated, or cleared. The state field 313 may include one or more variables to indicate that the alarms associated with a network element are in the same state or in different states.

The action field 314 may store an indication of the type of action taken on an alarm. For example, an indication of "PA" may represent that activity for this
15 particular alarm is planned. The action field 314 may be left blank when no action has been taken on the alarm. The time field 315 may store an indication of the time that the alarm occurred. The time may, for example, be stored in HH:MM:SS format or some other format. The date field 316 may store an indication of the date that the
20 event occurred. The date may, for example, be stored in MM/DD/YYYY format or some other format.

The NE ID field 317 may store an identifier of the network element on which

the alarm occurred. The NE ID field 317 may, for example, store the identifier as a Common Language Location Identifier (CLLI). Other techniques for identifying the network element may alternatively be used.

The alarm description field 318 may store information describing the problem associated with the alarm. The alarm description field 318 may include, for example, an indication that a fire has been detected at a particular network element, an identity of a particular port that has failed, or the like. The database 310 may also include an acknowledgement field (not shown) that stores an identifier associated with the user (if any) that acknowledged the alarm.

Database 330 (FIG. 3B) may include a group of entries 325 that relate to events that occurred in the network 110. Each entry 325 may include information stored in one or more of the following exemplary fields: a network element field 331, an ID field 332, an alarms field 333, a tickets (TT) field 334, a held alarms (HA) field 335, a notes field 336, an incidents (IN) field 337, a users field 338, an escalated alarm field 339, and a last modified field 340. Database 330 may include additional or different fields that would aid the server 130 in searching and sorting information in the database 330.

The network element field 331 may store one or more identifiers representing the network element type and its alarm state. A typical network element type may include, for example, a frame relay switch, an Asynchronous Transfer Mode (ATM) switch, an Internet Protocol (IP) router, or the like. The network element type may be associated with an identifier representing the network element's alarm state. Typical

alarm states could include critical, major, minor, and informational. The ID field 332 may store an identifier of the network element. Similar to database 310, the identifier may be stored as a CLLI.

The alarms field 333 may store information regarding the states of the alarms associated with a particular network element. As illustrated, the alarms field 333 may include a critical state (C) subfield, a major state (MA) subfield, a minor state (MI) subfield, and an informational state (I) subfield. The critical state, major state, minor state, and informational state subfields may store a value indicative of the number of alarms associated with a particular network element that is in that particular state.

The alarms field 333 may also include a total alarms subfield that stores a value representing the total number of alarms associated with a particular network element. As illustrated, the network element ABCDEFG03H is associated with 130 total alarms, of which 32 are critical, 35 are major, 54 are minor, and 9 are informational.

The tickets field 334 may store an indication of the number of outstanding trouble tickets that are associated with a network element. The held alarms field 335 may store an indication of the number of outstanding alarms that are on hold. The notes field 336 may store an indication of the number of outstanding notes associated with a particular network element. The notes field 336 may also store the actual notes for the particular network element.

The incidents field 337 may store an indication of the number of outstanding incident reports associated with a network element. The users field 338 may store an indication of the number of operators that are currently monitoring a particular

network element. The escalated alarms field 339 may store an indication of the number of escalated alarms associated with a particular network element. The last modified field 340 may store the date and time of the last time in which the information in fields 332-339 for a particular network element has been modified.

5

EXEMPLARY NETWORK OPERATIONS CENTER

FIG. 4 illustrates an exemplary network operations center 140 consistent with the present invention. The network operations center 140 may include a bus 402, a processor 404, a main memory 406, a ROM 408, a storage device 410, an output device 412, an input device 414, and a communication interface 416. The bus 402 may include one or more conventional buses that permit communication among the components of the network operations center 140.

The processor 404 may include any type of conventional processor or microprocessor that interprets and executes instructions. The main memory 406 may include a RAM or another type of dynamic storage device that stores information and instructions for execution by the processor 404. Main memory 406 may also be used to store temporary variables or other intermediate information during execution of instructions by processor 404.

ROM 408 may include a conventional ROM device and/or another type of static storage device that stores static information and instructions for processor 404.

20

The storage device 410 may include a magnetic disk or optical disk and its corresponding drive and/or some other type of magnetic or optical recording medium and its corresponding drive for storing information and instructions.

The output device 412 may include one or more conventional mechanisms that output information to an operator, including a display, a printer, a speaker, etc. The input device 414 may include one or more conventional mechanisms that permit the operator to input information to the system 140, such as a keyboard, a mouse, a pen, voice recognition and/or biometric mechanisms, etc. The communication interface 416 may include any transceiver-like mechanism that enables the network operations center 140 to communicate with other devices and/or systems, such as the server 130. For example, the communication interface 416 may include a modem or an Ethernet interface to a network. Alternatively, communication interface 416 may include other mechanisms for communicating via a network, such as network 110.

The network operations center 140 improves network troubleshooting in response to processor 404 executing sequences of instructions contained in a computer-readable medium, such as memory 406. Such instructions may be read into memory 406 from another computer-readable medium, such as a storage device 410, or from a separate device via communication interface 416. A computer-readable medium may include one or more storage devices and/or carrier waves. Execution of the sequences of instructions contained in memory 406 causes processor 404 to perform the process steps that will be described hereafter. In alternative embodiments, hard-wired circuitry may be used in place of or in combination with software instructions to implement the present invention. Thus, the present invention is not limited to any specific combination of hardware circuitry and software.

The network operations center 140, consistent with the present invention, provides network management information to an operator via a group of graphical user interfaces. The graphical user interfaces may be provided to the operator at, for example, the network operation center's output device 412 or at an output device located remotely therefrom.

FIGS. 5-8 illustrate exemplary graphical user interfaces, consistent with the present invention, that facilitate network management operations. FIG. 5 illustrates a first exemplary graphical user interface 500 consistent with the present invention. In FIG. 5, the exemplary graphical user interface 500 provides an active alarm interface that includes an active alarm window 505 and a most recent alarm window 510 for one or more network elements. For simplicity, the active alarm interface 500 provides alarms associated with a single network element, namely network element ABCDEFG03H.

The active and most recent alarm windows 505 and 510 include the following exemplary fields: a type field, a number (NO) field, a state (ST) field, an action (AT) field, a time field, a date field, a network element (NE) identifier (ID) field, a detailed alarm description field, and an acknowledge field. The type field may include an identifier, in the form of one or more words or icons, indicating the type of alarm associated with a network element. As illustrated, typical alarms may include, for example, a fire alarm, a port alarm, a line alarm, and the like. To illustrate the severity of a particular alarm, the identifiers may be of different colors. For example, dark red may be used to represent a critical alarm, red may be used to represent a

major alarm, yellow may be used to represent a minor alarm, and blue may be used to represent an informational alarm.

The number field may include an indication of the number of alarms represented by a single alarm identifier in the type field. The state field may include an indication, represented by one or more letters, of the state of a particular alarm. For example, an "A" may represent an acknowledged alarm, an "E" may represent an escalated alarm state, an "AE" may represent an alarm that has been acknowledged and escalated, and a "C" may represent that an alarm has been cleared. Uppercase letters in the state field may indicate that all alarms associated with a particular network element are in the same state. Lowercase letters may indicate that some, but not all, of the alarms are in the specified state. The state field may be left blank to indicate that an alarm has not been acknowledged, escalated, or cleared. It will be appreciated that other indications may alternatively be used.

The action field may include an indication of the type of action taken on an alarm. For example, an indication of "PA" may represent that activity for this particular alarm is planned. The action field may be left blank when no action has been taken on the alarm. The time field may include the time that a particular alarm occurred. The time may, for example, be represented in HH:MM:SS format or any other format. The date field may include the date that the alarm occurred. The date may, for example, be represented in MM/DD/YYYY format or any other format.

The NE ID field may include an identifier of the network element on which the alarm occurred. The NE ID field may, for example, include the identifier as a

Common Language Location Identifier (CLLI). Other techniques for identifying the network element may alternatively be used. If the active and most recent alarm windows 505 and 510 include information for a single network element, as in FIG. 5, the NE ID field may be removed.

5 The alarm description field may include information describing the problem associated with a particular alarm. The alarm description field may include, for example, an indication that a fire has been detected at a particular network element, an identity of a particular port that has failed, and the like.

10 The acknowledge field may include one or more initials of an operator that has acknowledged a particular alarm. The active and most recent alarm windows 505 and 510 may include other fields (not shown) that aid a network operator in managing or troubleshooting a network, such as network 110.

15 The active alarm window 505 provides the operator with a listing of active alarms. As new alarms occur in the network 110, the older alarms are scrolled out of the window 505. Through the use of the scroll bar, the operator may view alarms that have scrolled out of the window 505.

20 The most recent alarm window 510 displays the most recent alarms in the network 110. The number of most recent alarms displayed may be configured by the operator. When monitoring large networks with high alarm volume, the most recent alarm window 510 ensures that critical alarms (e.g., outages) always show up in the visible area on the operator's screen. Conventional troubleshooting techniques typically have a single active workspace, such as window 505, to view alarms and act

on them. It is likely that the newly arrived alarm will get scrolled-off from the visible area in the window, as operators are working on alarms that already exist in the window.

If an operator wants to act on a new alarm immediately upon arrival (e.g.,
5 acknowledge it), the operator can select the alarm row in the most recent alarm window 510 and the same alarm instance is automatically selected in the active alarm window 505. The operator may then proceed to acknowledge the alarm in the active alarm window 510.

FIG. 6 illustrates an alternative exemplary graphical user interface 600
10 consistent with the present invention. As illustrated, the graphical user interface 600 includes a trouble information matrix that provides an operator with a summary view of each network element in a system, such as system 100. The trouble information matrix 600 may include the following exemplary fields: a network element (NE) field,
15 an identifier (ID) field, an alarms field, a tickets field, a held alarms field, a notes field, an incidents (IN) field, a users (US) field, an escalated alarms (EA) field, and a last modified field.

The network element field may include one or more identifiers, in the form of one or more words or icons, representing a network element type and its alarm state. As illustrated, network element types may include, for example, a frame relay (FR)
20 switch, an Asynchronous Transfer Mode (ATM) switch, an Internet Protocol (IP) router, or the like. To readily identify the severity of the alarms associated with a particular network element, the network element identifiers may be associated with a

color. For example, dark red may be used to represent a critical alarm, red may be used to represent a major alarm, yellow may be used to represent a minor alarm, and blue may be used to represent an informational alarm. When a network element is associated with alarms of differing severity, the network element may be associated with a color indicative of the alarm having the highest severity.

The ID field may include an identifier of the network element. In an implementation consistent with the present invention, the identifier may be displayed as a CLLI. The alarms field may include information regarding the states of the alarms associated with a particular network element. The alarms field may include a critical state (CR) subfield, a major state (MAJ) subfield, a minor state (MIN) subfield, an informational state (INFO) subfield, and a total alarms (TOTAL) subfield.

The critical state, major state, minor state, and informational state subfields may include a value indicative of the number of alarms associated with a particular network element that is in that particular state. The total alarms subfield may include a value indicative of the total number of alarms associated with a particular network element. As illustrated, the network element ABCDEFG03H is associated with 130 total alarms, of which 32 are critical, 35 are major, 54 are minor, and 9 are informational.

The tickets field may include an indication of the number of outstanding trouble tickets that are associated with a network element. The held alarms field may include an indication of the number of outstanding alarms, associated with a network element, that are on hold. The notes field may include an indication of the number of

outstanding notes associated with a particular network element.

The incidents field may include an indication of the number of outstanding incident reports associated with a network element. The users field may include an indication of the number of operators that are currently monitoring the network element. The escalated alarms field may include an indication of the number of alarms associated with a particular network element that have an escalated status. The last modified field may include the date and time of the last time in which information for a particular network element has been modified.

The trouble information matrix 600 provides an operator with the status of events associated with selected network elements and allows the operator to quickly access information in a way not available in conventional systems. For example, selecting a network element in the network element field or on one of the numbers in the alarm field, the operator may be taken to the active alarm interface 500 where an alarm may be acknowledged or acted upon. An operator may select a network element or alarm number by, for example, by a left-click or double-click operation. By selecting a number in the tickets field, the operator may be provided, via, for example, a trouble ticket viewer, with a more detailed view of the the trouble tickets associated with a particular network element.

By selecting a number in the held alarms field, the operator may be taken to a more detailed view of the alarms that are currently on hold for a particular network element. Similarly, by selecting a number in the notes field, the operator may be taken to a notes viewer in which the operator can read the notes associated with a

particular network element. More detailed views of the information in the users and escalated alarms fields may be obtained by selecting a number in those fields. For example, an operator may be provided with a list of names and contact information for users that are monitoring a particular network node by selecting the users number in
5 the users field.

FIG. 7 illustrates another exemplary graphical user interface 700 consistent with the present invention. In FIG. 7, the graphical user interface 700 includes a geographical map 710 that illustrates points of presence and individual network elements according to their geographical location. The graphical user interface 700 also visually maps outstanding trouble tickets to objects displayed in the geographical map 710. If a particular point of presence has outstanding trouble tickets on any network elements housed therein, a small "T" icon may be displayed next to the point
10 of presence icon.

By selecting a particular point of presence or network element that is associated with a trouble ticket, the graphical user interface 700 may provide an operator with a number of options. In one option, the graphical user interface 700 may provide the operator with a more detailed view 720 of the geographical area affected. The operator may also be provided with a "Show Trouble Tickets" menu that allows for trouble tickets to be viewed in a trouble ticket management system of
15 the operator's choice (e.g., Remedy). Similar viewing options may be provided for individual network elements as users "drill down" into a point of presence by selecting
20 the point of presence on the geographical map 710.

FIG. 8 illustrates yet another exemplary graphical user interface 800 consistent with the present invention. In FIG. 8, the graphical user interface 800 allows an operator to visualize and navigate a network, such as network 110, in three dimensions. The graphical user interface 800 may, for example, be provided as a standard Web browser virtual reality modeling language (VRML) plug-in.

The graphical user interface 800 includes a network topology window 810, navigation tools 820, and management tools 830. In the network topology window 810, the network may be broken down into a group of logical network planes (e.g., Switching planes, Transmission planes, Signaling planes, Customer Access planes, etc.). This provides a network operator with a convenient way to analyze a particular portion of the network of interest to that operator.

The network topology window 810 also illustrates how the individual logical planes and the network elements within those planes are interconnected. A network operator of the system may for example, define the logical planes and the association between planes and network elements. Network elements displayed in the network topology window 810 may be colored according to the their alarm status in real-time. By displaying the alarm status of network elements in the network and the interconnection of those network elements to other network elements in the network 110, network operators may quickly determine problem areas and how they affect the rest of the network 110.

The navigation tools 820 allow a network operator to "walk" the network in the network topology window 810. The operator may zoom in and out in order to get

a closer or more distant view of the network, rotate the logical planes in the network, and the like.

5 The management tools 830 include a NetPlanes button, a Deselect button, a LiveAlarms button, an AlarmMatrix button, a PerfGraph button, a Trace button, and a Quit button. The NetPlanes button allows for different logical planes to be toggled in and out of the network topology window 810. The operator may select one or more network elements in the network topology window 810 by, for example, clicking on them. The Deselect button allows for selected network elements to be deselected. As
10 in more traditional two-dimensional network topology displays, an operator may select network elements in 3D space and invoke operations on them or open other informational and real-time windows by clicking on the "LiveAlarms," "AlarmMatrix," or "PerfGraph" buttons. By selecting a network element on one plane and clicking on the "Trace" button, all "affected" network elements and links on other planes and links between planes will be highlighted. The "Quit" button exits the 3D
15 view and returns to a login screen.

Unlike standard two-dimensional map representations of network topologies, the graphical user interface 800 offers the following unique advantages. The network topology window 810 automatically controls the level of detail of displayed information. For example, as operators "walk the network," the labels for network
20 elements in the current locale of the operator's view get displayed automatically. This allows for uncluttered displays of large network data sets with only relevant information shown in greater detail.

The network topology window 810 allows operators to visualize network topology more naturally. The network topology window 810 shows relationships between logical layers of the network and helps operators visually relate faults to network topology faster. Once a problem is isolated to a particular network layer, an operator can further focus on network elements on this layer and turn off displaying other layers.

Unlike conventional network displays, operators can stay within the context of a single web browser frame as they navigate the network. They do not have to "pop-up" numerous windows on the desktop to "drill down the network" (e.g., going from a customer circuit view into the SONET ring that carries that circuit).

EXEMPLARY PROCESSING

FIG. 9 illustrates an exemplary process, consistent with the present invention, to improve management of a network, such as network 110. Processing may begin with a user (e.g., a network engineer) initializing a management process at the network operations center 140 [act 905]. This initialization procedure may involve the user double-clicking an icon on a screen at the network operations center 140, typing in a command, or some other well-known technique. The initialization procedure may also involve some type of well-known log-in process by which the user may enter an identifier and password that are authenticated by the network operations center 140.

The network operations center 140 may then provide a menu of possible network management options [act 910]. FIG. 10 illustrates an exemplary graphical

user interface 1000 that may be provided to the user of network operations center 140.

As illustrated, the graphical user interface 1000 requests the selection of a network management option. The options may include a network element management option, a trouble information matrix option, a geomap-integrated trouble view option, and a three-dimensional (3D) network topology management option.

Assume that the user selects the network element management option [act 920]. The network operations center 140 may request the user to provide the identity a network element of interest [act 922]. Upon entry of a network element identifier, the network operations center 140 may request information about the network element from the server 130 [act 924]. In response, the server 130 may transmit information, for example, from database 310, that pertains to the requested network element [act 926].

Upon receipt of the information from server 130, the network operations center 140 may provide the user with the requested information [act 928]. The information may be provided, for example, via the graphical user interface 500 illustrated in FIG. 5. As illustrated therein, the graphical user interface 500 may provide the user with detailed alarm information for a particular network element (e.g., ABCDEFG03H). The user may monitor alarms associated with the requested network element in an active alarm window 505. The user may also monitor alarms that have most recently occurred in a most recent alarms window 510. The user may use the graphical user interface 500 to manage the network [act 960].

Assume that the user selects the trouble information matrix option [act 930].

Upon the selection of the trouble information matrix option, the network operations center 140 may request current network information from the server 130 [act 932]. In response, the server 130 may transmit information from database 330 and/or database 310 to the network operations center 140 [act 934].

5 Upon receipt of the information from server 130, the network operations center 140 may provide the user with the requested information [act 936]. The information may be provided, for example, via the graphical user interface 600 illustrated in FIG. 6. As illustrated therein, the graphical user interface 600 may provide the user with a summary view of the state of each network element in the network. This allows the user to readily determine the number of alarms associated with a particular network element and the severity of those alarms. The graphical user interface 600 simplifies management of large-scale telecommunications networks by allowing the user to quickly retrieve detailed information about any network element in the network. The user may use the graphical user interface 600 to manage the network [act 960].

 Assume that the user selects the geomap-integrated trouble view option [act 940]. Upon the selection of the geomap-integrated trouble view option, the network operations center 140 may request current network information from the server 130 [act 942]. In response, the server 130 may transmit information from database 330 and/or database 310 to the network operations center 140 [act 944].

 Upon receipt of the information from server 130, the network operations center 140 may provide the user with the requested information [act 946]. The

information may be provided, for example, via the graphical user interface 700 illustrated in FIG. 7. As illustrated therein, the graphical user interface 700 may provide the user with geographic locations of points of presence and network elements in the network. The graphical user interface 700 may also map trouble tickets to objects in the network. The user may readily determine the geographic location of alarms in the network. The user may use the graphical user interface 700 to manage the network [act 960].

Assume that the user selects the 3D network topology option [act 950]. Upon the selection of the 3D network topology option, the network operations center 140 may request current network information from the server 130 [act 952]. In response, the server 130 may transmit information from database 330 and/or database 310 to the network operations center 140 [act 954].

Upon receipt of the information from server 130, the network operations center 140 may provide the user with the requested information [act 956]. The information may be provided, for example, via the graphical user interface 800 illustrated in FIG. 8. As illustrated therein, the graphical user interface 800 may provide the user with a real-time, three-dimensional model of the network. Network elements in the model may be shaded in order to depict current states of the network elements. The graphical user interface 800 provides the user with the ability to navigate through the network, to represent the network as a logical layer of planes (e.g., customer access, switching, transmission, etc.), and to readily determine how a particular alarm affects the overall network. The user may use the graphical user

interface 800 to manage the network [act 960].

CONCLUSION

Systems and methods, consistent with the present invention, provide a mechanism to improve network management. The mechanism provides a user (e.g., a network engineer) with several graphical user interfaces with which to manage network operations. The graphical user interfaces allow the user to easily assimilate a large amount of information thereby facilitating the management of any sized network.

The foregoing description of exemplary embodiments of the present invention provides illustration and description, but is not intended to be exhaustive or to limit the invention to the precise form disclosed. Modifications and variations are possible in light of the above teachings or may be acquired from practice of the invention. For example, the described implementation includes software and hardware, but elements of the present invention may be implemented as a combination of hardware and software, in software alone, or in hardware alone. Also, while a series of steps has been described with regard to FIG. 9, the order of the steps may be varied in other implementations consistent with the present invention. No element, step, or instruction used in the description of the present application should be construed as critical or essential to the invention unless explicitly described as such.

The scope of the invention is defined by the following claims and their equivalents.

WHAT IS CLAIMED IS:

1. A method for managing a network, comprising:
providing a first list of events occurring in the network;
simultaneously providing a second list of events occurring in the
network, the second list comprising a predetermined number of most recent events;
5 and
managing the network using the first and second lists.
2. The method of claim 1 further comprising:
setting a number of events to be provided in the second list.
3. The method of claim 1 further comprising:
selecting an event in the second list, and
automatically selecting, in response to selecting an event in the second
list, an equivalent event in the first list.
4. The method of claim 3 further comprising:
acknowledging the equivalent event in the first list.
5. The method of claim 1 wherein the first and second lists include events
relating to at least one network element in the network.

6. A system for managing a network, comprising:
means for providing a first list of events in the network;
means for simultaneously providing a second list of events in the
network, the second list comprising a predetermined number of most recent events;

5 and

means for managing the network using the first and second lists.

7. A system for managing a network, comprising:
a user device configured to transmit a request for current network
information, provide a first list of events occurring in the network, and simultaneously
provide a second list of events occurring in the network, the second list comprising a

5 number of most recent events; and

a server configured to receive the request for current network
information and provide the current network information to the user device.

8. The system of claim 7 wherein the request includes at least one
network identifier.

9. The system of claim 8 wherein, when providing the current network
information, the server is configured to:

provide current network information relating to the at least one network identifier.

10. The system of claim 7 wherein the number of most recent events provided in the second list is set by a user.

11. The system of claim 10 wherein the user device is further configured to:

select an event in the second list, and

automatically select, in response to selecting an event in the second list,

5 an equivalent event in the first list.

12. A computer-readable medium containing instructions for controlling at least one processor to perform a method for managing a network, the method comprising:

providing a first list of events in the network;

5 simultaneously providing a second list of events in the network, the second list comprising at least one most recent event; and

managing the network using the first and second lists.

13. The computer-readable medium of claim 12 wherein the method further comprises:

setting a number of events to be provided in the second list.

14. A device for managing a network having a plurality of network elements, comprising:

a memory configured to store instructions; and

a processor configured to execute the instructions to provide a list of

5 identifiers associated with the plurality of network elements, each network element identifier being associated with a state indication.

15. The device of claim 14 wherein the processor is further configured to:

provide, for each network element identifier, a total number of alarms associated with each of the plurality of network elements.

16. The device of claim 15 wherein the processor is further configured to:

provide, for each network element identifier, a value indicating a quantity of major alarms associated with a respective network element, and

5 provide, for each network element identifier, a second value indicating a quantity of minor alarms associated with a respective network element.

17. The device of claim 14 wherein the processor is further configured to:

provide, for each network element identifier, a value representing a number of users monitoring a respective network element.

18. The device of claim 17 wherein the processor is further configured to:
provide, in response to selecting the value representing the number of
users monitoring a network element, contact information for each user.

19. The device of claim 14 wherein the processor is further configured to:
provide, for each network element identifier, a value representing a
number of escalated alarms associated with a respective network element.

20. A method for managing a network having a plurality of network
elements, comprising:
receiving a request for network information;
providing a list of network element identifiers associated with the
5 plurality of network elements, the list indicating a state of each of the plurality of
network elements; and
managing the network using the list.

21. The method of claim 20 wherein the list further indicates a number of
escalated alarms associated with each of the plurality of network elements.

22. The method of claim 20 wherein the list further includes a number of
users currently monitoring each of the plurality of network elements.

23. The method of claim 20 wherein the list further includes at least one of a total number of alarms associated with each of the plurality of network elements, a total number of trouble tickets associated with each of the plurality of network elements, a total number of held alarms associated with each of the plurality of network elements, and a network element type indication for each of the plurality of network elements.

24. A computer-readable medium containing instructions for controlling at least one processor to perform a method for managing a network having a plurality of network elements, the method comprising:

receiving a request for network information;

providing a list of network element identifiers associated with the plurality of network elements, the list indicating a state of each of the plurality of network elements; and

managing the network using the list.

25. The computer-readable medium of claim 24 wherein the list further includes at least one of a value representing a number of escalated alarms associated with each of the plurality of network elements, a value representing a number of users currently monitoring each of the plurality of network elements, a total number of alarms associated with each of the plurality of network elements, a total number of trouble tickets associated with each of the plurality of network elements, a total

number of held alarms associated with each of the plurality of network elements, and
a network element type indication for each of the plurality of network elements.

26. A method for managing a network having a plurality of network
devices, comprising:

associating events in the network with one of the plurality of network
devices;

5 providing a geographical map, the geographical map displaying
locations of each of the plurality of network devices and indicating which of the
plurality of network devices are associated with at least one event; and

managing the network using the geographical map.

27. The method of claim 26 wherein the network devices include points of
presence and network elements.

28. The method of claim 26 further comprising:

selecting a network device having at least one associated event; and

providing information regarding the at least one associated event.

29. The method of claim 26 wherein the geographical map further displays
a state of each network device.

30. A device for managing a network having a plurality of network devices, comprising:

a memory configured to store instructions; and

a processor configured to execute the instructions to associate an event

5 in the network with a network device and provide a geographical map, the geographical map displaying locations of network devices and indicating which network devices are associated with at least one event.

31. The device of claim 30 wherein the network devices include points of presence and network elements.

32. The device of claim 30 wherein the processor is further configured to: provide event information in response to selection of a network device having at least one event associated therewith.

33. The device of claim 30 wherein the processor is further configured to: display a state of each network device on the geographical map.

34. A computer-readable medium containing instructions for controlling at least one processor to perform a method for managing a network having a plurality of network devices, the method comprising:

- 5 associating events in the network with one of the plurality of network devices;
- providing a geographical map, the geographical map displaying locations of each of the plurality of network devices and indicating which of the plurality of network devices are associated with at least one event; and
- managing the network using the geographical map.

35. The computer-readable medium of claim 34 wherein the network devices include points of presence and network elements.

36. The computer-readable medium of claim 34 wherein the method further comprises:

 selecting a network device having at least one associated event; and

 providing information regarding the at least one associated event.

37. The computer-readable medium of claim 34 wherein the geographical map further displays a state of each network device.

38. A device for managing a network having a plurality of network elements, comprising:

 a memory configured to store instructions; and

a processor configured to execute the instructions to associate each
5 network element with one of a plurality of logical planes and provide a network map,
the network map displaying relationships between the plurality of logical planes and
those network elements associated with the plurality of logical planes.

39. The device of claim 38 wherein the plurality of logical planes includes
one or more of a transmission plane, a switching plane, a customer access plane, and a
signaling plane.

40. The device of claim 38 wherein the processor is further configured to:
allow a user to navigate through the network map.

41. The device of claim 38 wherein the processor is further configured to:
display a state of each network element in the network map.

42. The device of claim 38 wherein the network map is a three-
dimensional network map.

43. A method for managing a network having a plurality of network
elements, comprising:

associating each of the plurality of network elements with one of a
plurality of logical planes;

- 5 providing a network map, the network map displaying relationships between the plurality of logical planes and those network elements associated with the plurality of logical planes; and
- managing the network using the network map.

44. The method of claim 43 wherein the plurality of logical planes includes one or more of a transmission plane, a switching plane, a customer access plane, and a signaling plane.

45. The method of claim 43 wherein the managing includes:
- allowing a user to navigate through the network map.

46. The method of claim 43 wherein the providing includes:
- displaying a state of each network element in the network map.

47. The method of claim 43 wherein the network map is a three-dimensional network map.

48. A computer-readable medium containing instructions for controlling at least one processor to perform a method for managing a network having a plurality of network elements, the method comprising:

- associating each of the plurality of network elements with one of a
- 5 plurality of logical planes;
- providing a network map, the network map displaying relationships between the plurality of logical planes and those network elements associated with the plurality of logical planes; and
- managing the network using the network map.

49. A system for managing a network having a plurality of network elements, comprising:

- a user device configured to provide a user with a list of network management options, the options including a network element diagnostic option, a
- 5 network summary option, a geographical network management option, a three-dimensional network management option, transmit, in response to a selection of an option by the user, a request for current network information, provide the user with current network information according to the selected option; and
- a server configured to receive the request for current network
- 10 information and transmit current network information to the user device.

50. The system of claim 49 wherein the user device is configured to:

provide, in response to a selection of the network element diagnostic option, a first list of events occurring in the network, and

simultaneously provide a second list of events occurring in the
5 network, the second list comprising a predetermined number of most recent events.

51. The system of claim 49 wherein the user device is configured to:
provide, in response to a selection of the network summary option, a
list of network element identifiers associated with the plurality of network elements,
each network element identifier being associated with a state indication.

52. The system of claim 49 wherein the user device is configured to:
associate, in response to a selection of the geographical network
management option, events in the network with one of the plurality of network
devices, and
5 provide a geographical map, the geographical map displaying locations
of each of the plurality of network devices and indicating which of the plurality of
network devices are associated with at least one event.

53. The system of claim 49 wherein the user device is configured to:
associate, in response to a selection of the three-dimensional network
management option, each of the plurality of network elements with one of a plurality
of logical planes, and

- 5 provide a network map, the network map displaying relationships between the plurality of logical planes and those network elements associated with the plurality of logical planes.

ABSTRACT

A system (130) improves network management. The system (130) associates an event in the network with a network device and provides a geographical map (710).

The geographical map (710) displays locations of network devices and indicates

5 which network devices are associated with at least one event.

100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100 1101 1102 1103 1104 1105 1106 1107 1108 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1130 1131 1132 1133 1134 1135 1136 1137 1138 1139 1140 1141 1142 1143 1144 1145 1146 1147 1148 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1189 1190 1191 1192 1193 1194 1195 1196 1197 1198 1199 1200 1201 1202 1203 1204 1205 1206 1207 1208 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1289 1290 1291 1292 1293 1294 1295 1296 1297 1298 1299 1300 1301 1302 1303 1304 1305 1306 1307 1308 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1389 1390 1391 1392 1393 1394 1395 1396 1397 1398 1399 1400 1401 1402 1403 1404 1405 1406 1407 1408 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1460 1461 1462 1463 1464 1465 1466 1467 1468 1469 1470 1471 1472 1473 1474 1475 1476 1477 1478 1479 1480 1481 1482 1483 1484 1485 1486 1487 1488 1489 1490 1491 1492 1493 1494 1495 1496 1497 1498 1499 1500 1501 1502 1503 1504 1505 1506 1507 1508 1509 1510 1511 1512 1513 1514 1515 1516 1517 1518 1519 1520 1521 1522 1523 1524 1525 1526 1527 1528 1529 1530 1531 1532 1533 1534 1535 1536 1537 1538 1539 1540 1541 1542 1543 1544 1545 1546 1547 1548 1549 1550 1551 1552 1553 1554 1555 1556 1557 1558 1559 1560 1561 1562 1563 1564 1565 1566 1567 1568 1569 1570 1571 1572 1573 1574 1575 1576 1577 1578 1579 1580 1581 1582 1583 1584 1585 1586 1587 1588 1589 1590 1591 1592 1593 1594 1595 1596 1597 1598 1599 1600 1601 1602 1603 1604 1605 1606 1607 1608 1609 1610 1611 1612 1613 1614 1615 1616 1617 1618 1619 1620 1621 1622 1623 1624 1625 1626 1627 1628 1629 1630 1631 1632 1633 1634 1635 1636 1637 1638 1639 1640 1641 1642 1643 1644 1645 1646 1647 1648 1649 1650 1651 1652 1653 1654 1655 1656 1657 1658 1659 1660 1661 1662 1663 1664 1665 1666 1667 1668 1669 1670 1671 1672 1673 1674 1675 1676 1677 1678 1679 1680 1681 1682 1683 1684 1685 1686 1687 1688 1689 1690 1691 1692 1693 1694 1695 1696 1697 1698 1699 1700 1701 1702 1703 1704 1705 1706 1707 1708 1709 1710 1711 1712 1713 1714 1715 1716 1717 1718 1719 1720 1721 1722 1723 1724 1725 1726 1727 1728 1729 1730 1731 1732 1733 1734 1735 1736 1737 1738 1739 1740 1741 1742 1743 1744 1745 1746 1747 1748 1749 1750 1751 1752 1753 1754 1755 1756 1757 1758 1759 1760 1761 1762 1763 1764 1765 1766 1767 1768 1769 1770 1771 1772 1773 1774 1775 1776 1777 1778 1779 1780 1781 1782 1783 1784 1785 1786 1787 1788 1789 1790 1791 1792 1793 1794 1795 1796 1797 1798 1799 1800 1801 1802 1803 1804 1805 1806 1807 1808 1809 1810 1811 1812 1813 1814 1815 1816 1817 1818 1819 1820 1821 1822 1823 1824 1825 1826 1827 1828 1829 1830 1831 1832 1833 1834 1835 1836 1837 1838 1839 1840 1841 1842 1843 1844 1845 1846 1847 1848 1849 1850 1851 1852 1853 1854 1855 1856 1857 1858 1859 1860 1861 1862 1863 1864 1865 1866 1867 1868 1869 1870 1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676 2677 2678 2679 2680 2681 2682 2683 2684 2685 2686 2687 2688 2689 2690 2691

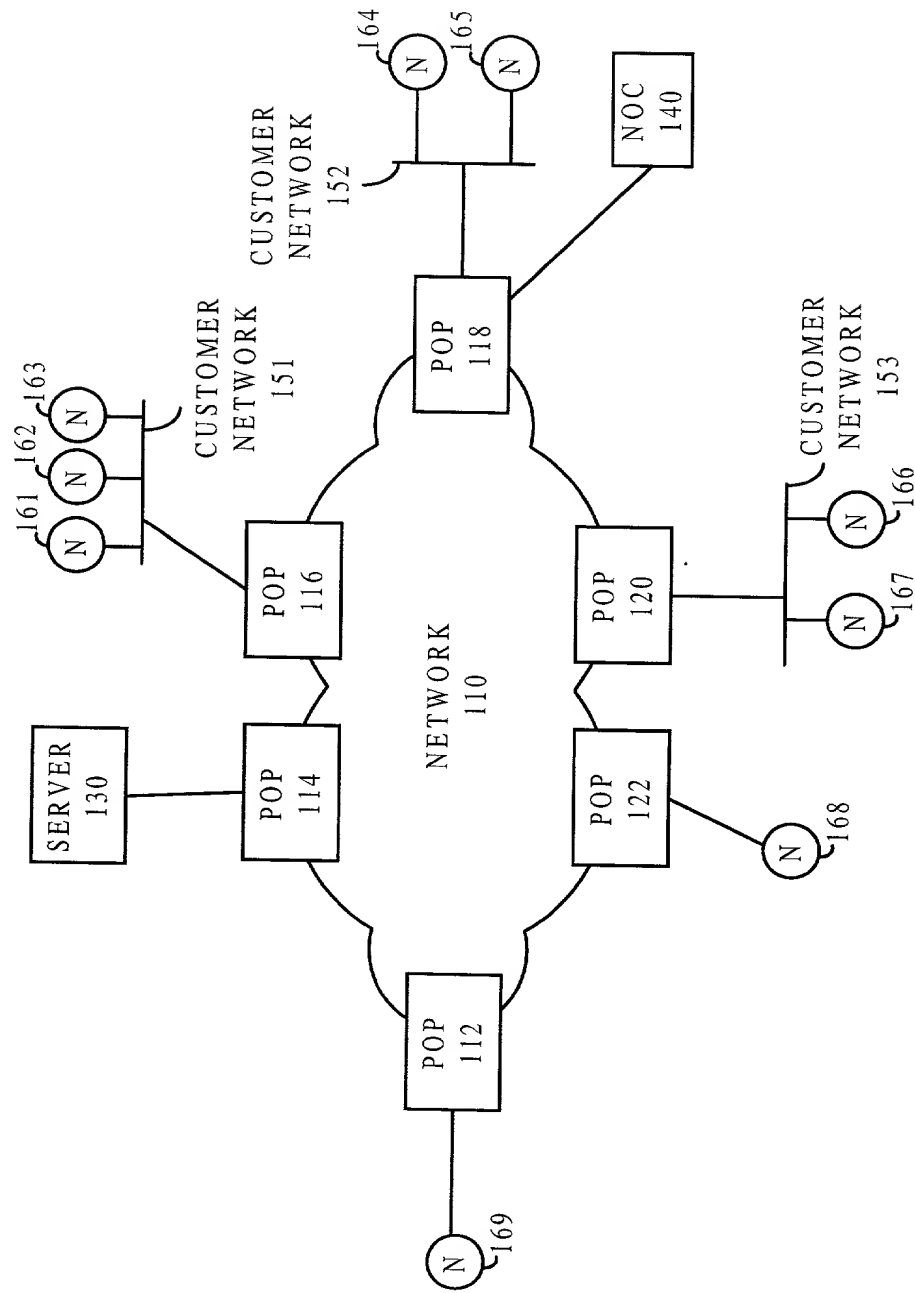


FIG. 1

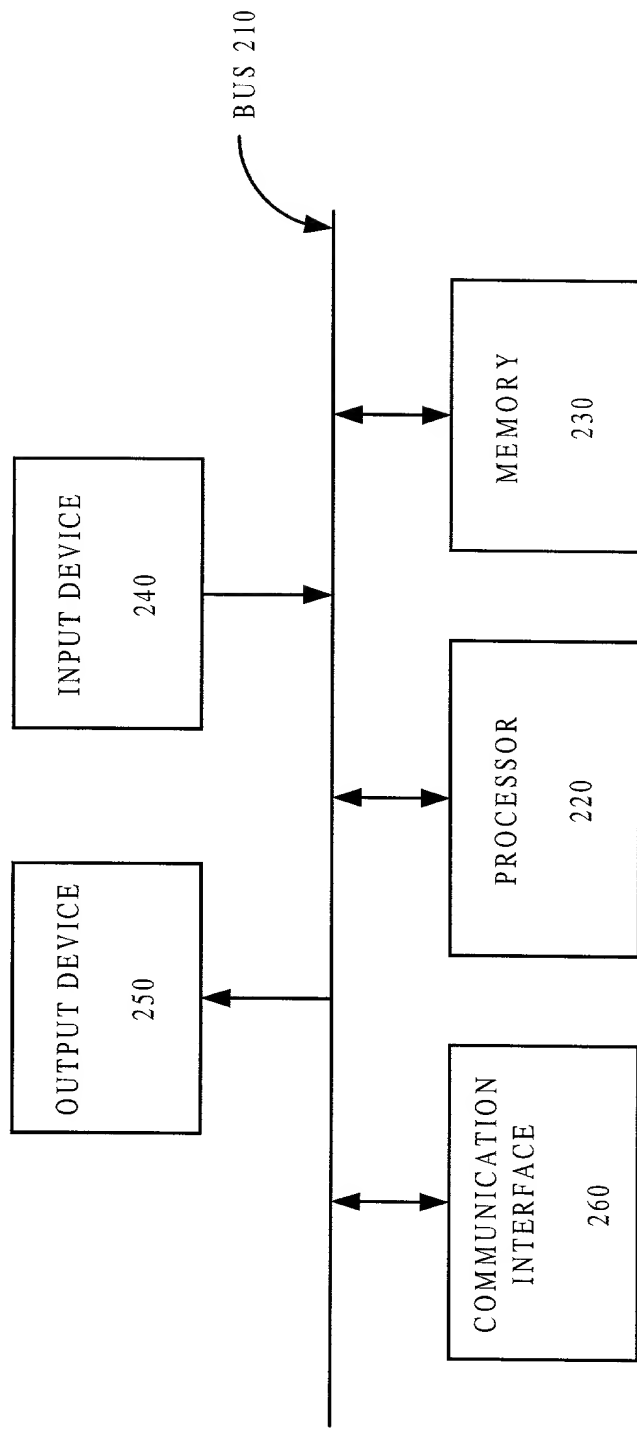


FIG. 2

ALARM TYPE	NUMBER	STATE	ACTION	TIME	DATE	NE ID	ALARM DESCRIPTION
311	312	313	314	315	316	317	318
FIRE	5	E		18:34:22	11/02/99	ABCDEFG03H	ALARM DESCRIPTION
LINE	1	E		18:34:24	11/02/99	ABCDEFG03H	ALARM DESCRIPTION
LINE	1	AE		18:34:28	11/02/99	ABCDEFG03H	ALARM DESCRIPTION
PORT	1	E		18:34:28	11/02/99	ABCDEFG03H	ALARM DESCRIPTION
LINE	2	A	PA	18:34:29	11/02/99	ABCDEFG03H	ALARM DESCRIPTION
PORT	1	E		18:34:29	11/02/99	ABCDEFG03H	ALARM DESCRIPTION

FIG. 3A

NE 331	ID 332	ALARMS 333					TT 334	HA 335	NOTES 336	IN 337	USERS 338	EA 339	LAST MODIFIED 340
		C	MA	MI	I	TOTAL							
FR SWITCH	ABCDEFG03H	32	35	54	9	130	20		14		2		11/02/1999 11:38:34
ATM SWITCH	ABCDEFG04H	21	98	20	10	149	21	3	2	1	4	1	11/02/1999 11:39:42
IP ROUTER	ABCDEFG05H	0	0	0	95	95	25		4		1		11/02/1999 11:38:34
FR SWITCH	ABCDEFG06H	0	0	0	87	87					1		11/02/1999 11:38:34
ATM SWITCH	ABCDEFG07H	0	0	0	64	64	2				1		11/02/1999 11:38:34
ATM SWITCH	ABCDEFG08H	0	20	0	0	20			1		1		11/02/1999 11:37:51

FIG. 3B

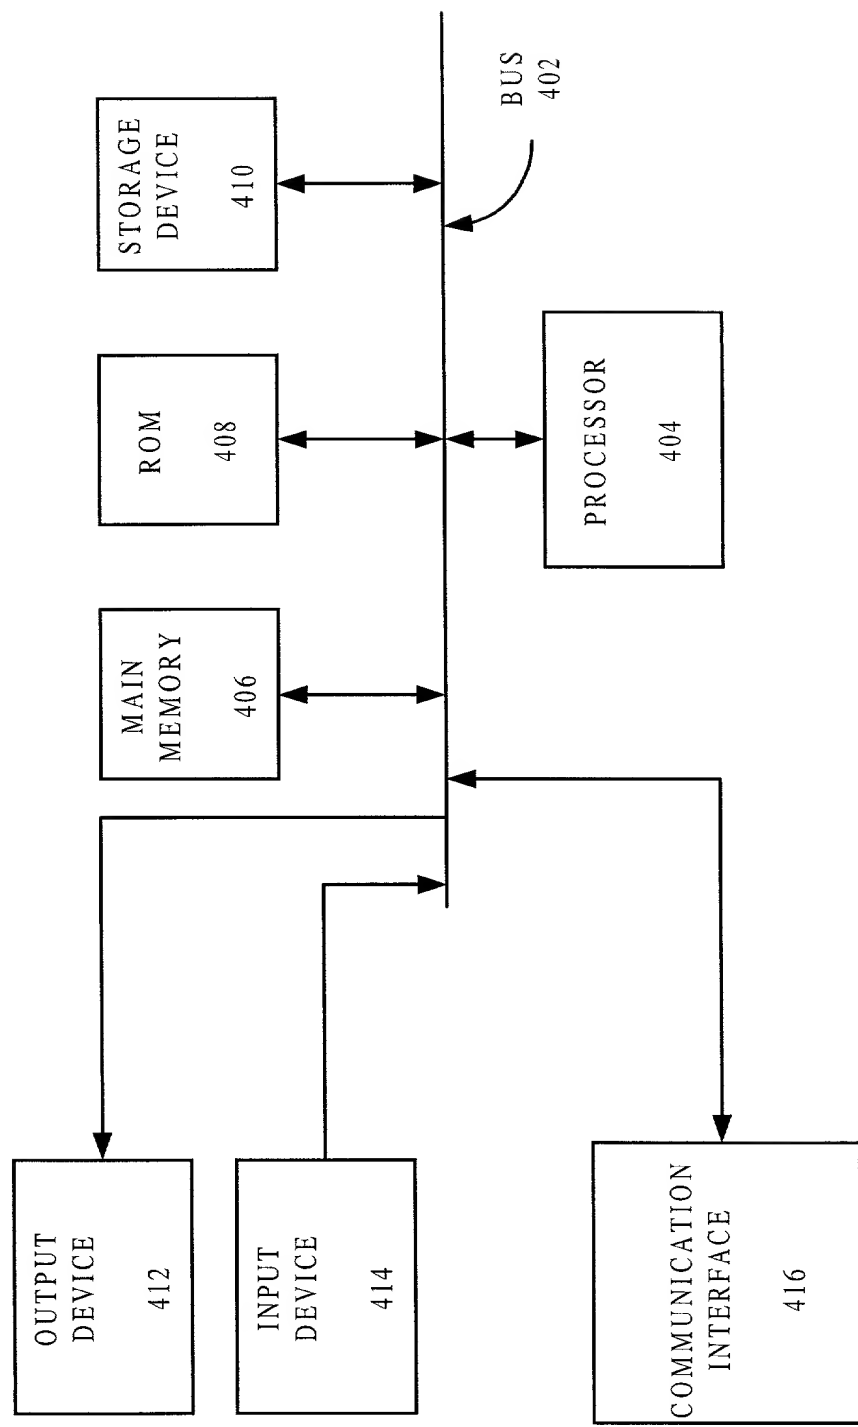


FIG. 4


510

FIG. 5

TROUBLE INFORMATION MATRIX													
FILE EDIT VIEW HELP													
NE	ID	ALARMS			MIN			INFO	TOTAL	TICKETS	HELD ALARMS	NOTES	IN
		CR	MAJ										US
													EA
													LAST MODIFIED
ATM	ABCDEFG04H	21	98	20	10	149				21	3	2	1
FR	ABCDEFG03H	32	35	54	9	130				20		14	2
IP	ABCDEFG05H	0	0	0	95	95				25		4	1
FR	ABCDEFG06H	0	0	0	87	87							1
ATM	ABCDEFG07H	0	0	0	64	64							1
ATM	ABCDEFG08H	0	20	0	0	20				2		1	1
ATM	ABCDEFG09H	0	20	0	0	20				4			1
IP	ABCDEFG10H	0	0	0	4	4							1
IP	ABCDEFG11H	0	0	0	3	3				1			1
ATM	ABCDEFG12H	0	0	0	1	1						1	1

FIG. 6

710

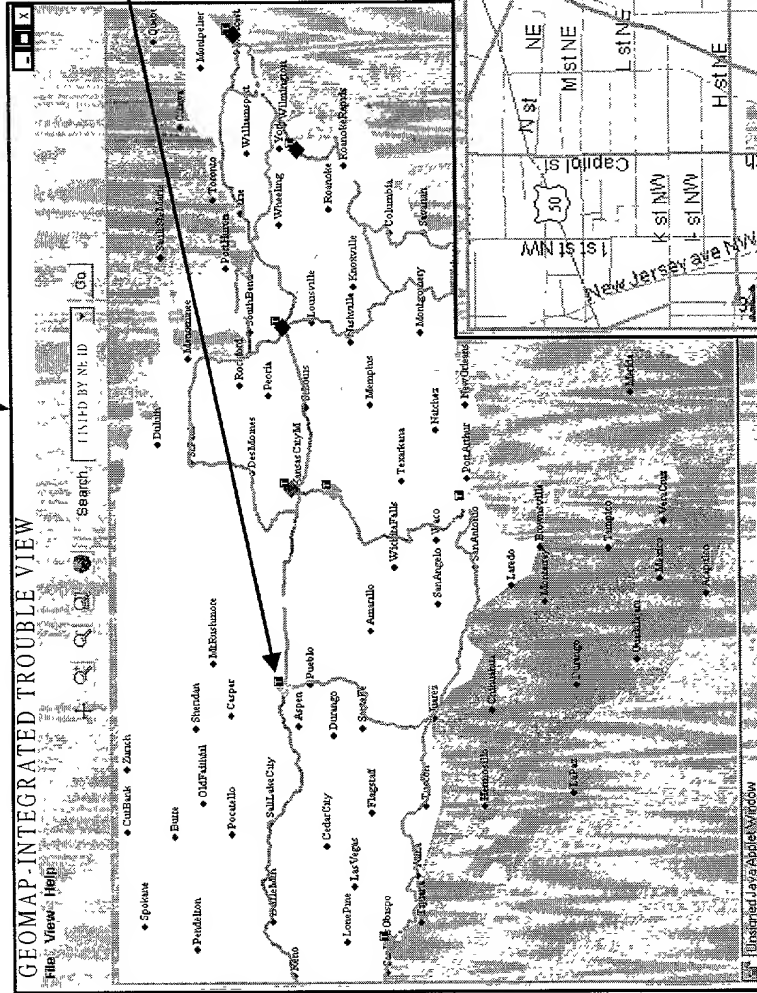

720

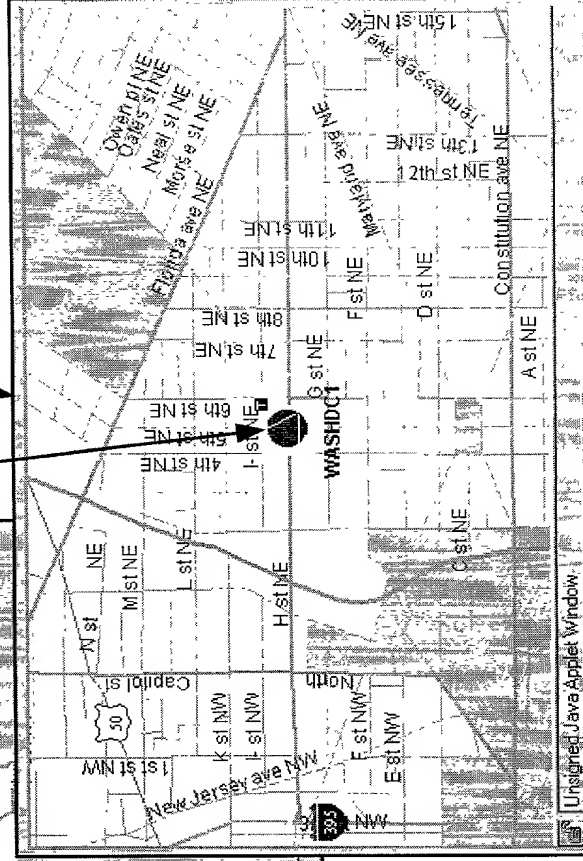


FIG. 7



FIG. 8

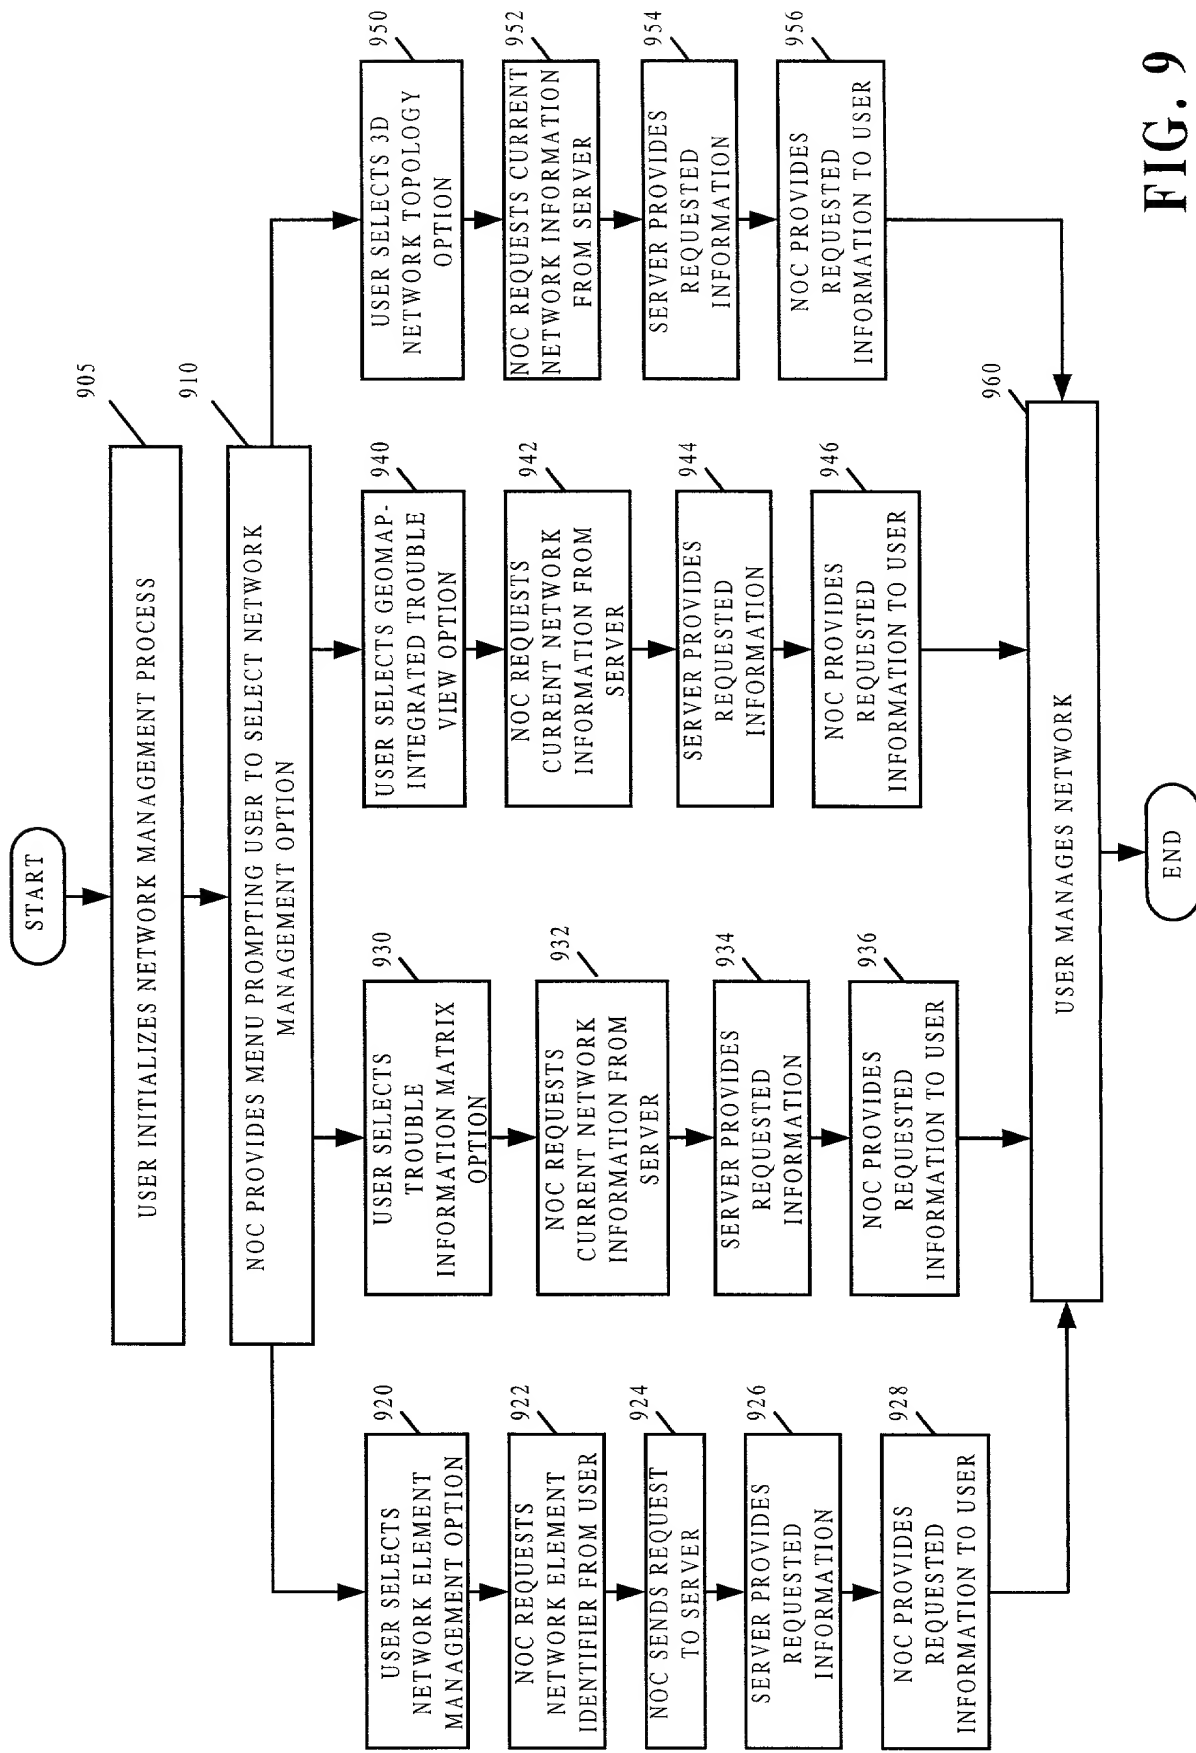


FIG. 9

1000

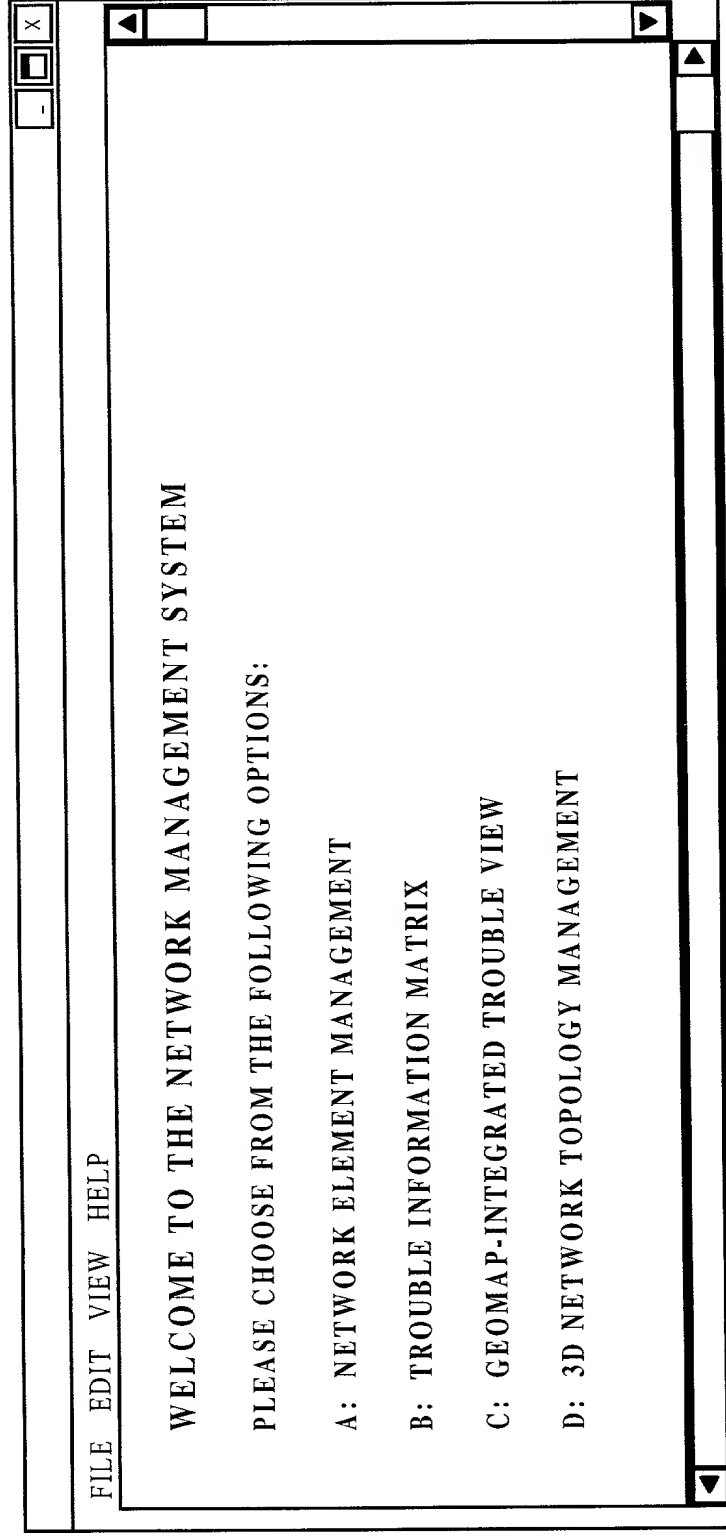


FIG. 10

**DECLARATION AND POWER OF ATTORNEY FOR PATENT
APPLICATION**

Attorney Docket No. 00-8008

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

SYSTEMS AND METHODS FOR MANAGING FAULTS IN A NETWORK

the specification of which (check one) ☒ [X] is attached hereto. ☐ [] was filed on
as Appln. Serial No. _____ and was amended on _____
(if applicable). I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

(Number)

(Country)

(Day/Month/Year filed)

☐ [_] Yes ☐ [_] No

I hereby claim the benefit under Title 35, United States Code, 119(e) of any United States provisional applications(s) listed below.

(Application Number)

(Filing Date)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date for this application:

(Appln. Serial No.)

(Filing Date)

(Status--patented, pending, abandoned)

Attorney Docket No. 00-8008

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Leonard C. Suchyta, Reg. No. 25,707, and James Weixel, Reg. No. 44,399

Address all telephone calls to James K. Weixel at telephone no. (781) 466-2220

Address all correspondence to Leonard C. Suchyta
Verizon Services Group
600 Hidden Ridge, HQE03G13
Irving, TX 75038

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR Weiya Luo

Inventor's signature _____ Date _____

Residence Boxborough, Massachusetts Citizenship USA

Post Office Address 71 Cortland Ln., Boxborough, MA 01719

FULL NAME OF SECOND INVENTOR Anthony Wogrin Confrey

Inventor's signature _____ Date _____

Residence Newton, Massachusetts Citizenship Irish

Post Office Address 25 Irving St., Newton, MA 02459

FULL NAME OF THIRD INVENTOR Michael J. Turok

Inventor's signature _____ Date _____

Residence Peabody, Massachusetts Citizenship USA

Post Office Address 403 Foxwood Cir., Peabody, MA 01960

FULL NAME OF FOURTH INVENTOR Bruce Wilson

Inventor's signature _____ Date _____

Residence Arlington, Massachusetts Citizenship USA

Post Office Address 183 Wright St., Arlington, MA 02474